

## LED EMERGENCY LIGHTING


IP20 EM Downlight

2W 197lm



IES Data Files available

### DIMENSIONS

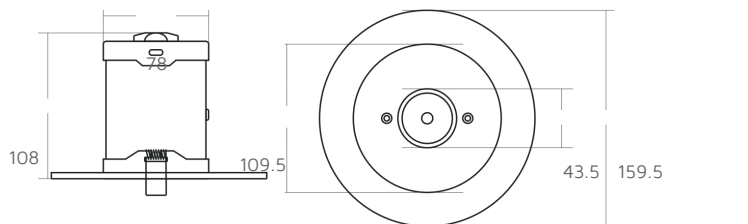

All units are in mm

### SPACING DATA

Mounting Height (m)	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape
2	6.4	6.1
2.5	7.7	7.1
3	9	7.9
3.5	10	8.6
4	10.9	9.2
6	13.5	11

### KEY DATA

Power	2W
Luminous Flux	197lm
Colour Temperature	6500K
IP Rating	IP20
Dimensions	110 x 108mm
Cut-Out Size	95-100mm
Warranty	3 Years

Part Number

NET-44-10-64

### TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.90
No. of LEDs	1
Driver Manufacturer	DPPUL
Total Circuit Power (W)	2W +/- 0.2W
Electrical Class	1
Operating Temp.	0°C to +40°C
Lamp Viewing Angle	50°
Lifespan	50,000 Hours
Battery Pack	Li battery 3.7V 2600 mAh
Lamp Viewing Angle	52°
Battery Warranty	1 Year
Charge Time	24 Hours
Discharge Time	>3 Hours
Self Test	No
Maintained	No
Housing Material	Aluminium
Bezel Colour	White
Weight	0.3Kg

### SUITABLE FOR

- Indoor applications with recessed mount option.
- Wide beam angle for open areas eg. offices and classrooms.

### FEATURES & BENEFITS

- Battery and Gear all in one unit.
- Integrated indicator LED.
- Non maintained.
- Compliant with EN 60598-2-22.