

LED EMERGENCY LIGHTING

IP20 EM Downlight 2W 197lm




3H

Emergency Function

IES Data Files available

DIMENSIONS

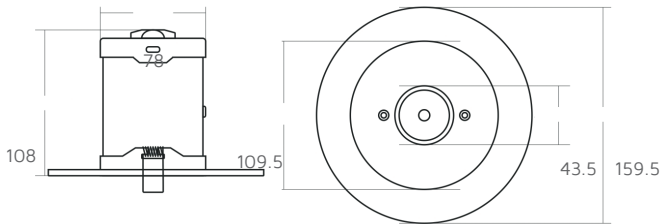

All units are in mm

SPACING DATA

Mounting Height (m)	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape
2	6.4	6.1
2.5	7.7	7.1
3	9	7.9
3.5	10	8.6
4	10.9	9.2
6	13.5	11

KEY DATA

Power	2W
Luminous Flux	197lm
Colour Temperature	6500K
IP Rating	IP20
Dimensions	110 x 108mm
Cut-Out Size	95-100mm
Warranty	3 Years

Part Number

NET-44-10-64

FEATURES & BENEFITS

- Battery and Gear all in one unit.
- Integrated indicator LED.
- Non maintained Emergency.
- Compliant with EN 60598-2-22.

TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.90
No. of LEDs	1
Driver Manufacturer	DPPUL
Total Circuit Power (W)	2W +/- 0.2W
Electrical Class	1
Operating Temp.	0°C to +40°C
Lamp Viewing Angle	50°
Lifespan _{L80}	50,000 Hours
Battery Pack	Li battery 3.7V 2600 mAh
Lamp Viewing Angle	52°
Battery Warranty	1 Year
Charge Time	24 Hours
Discharge Time	>3 Hours
Self Test	No
Maintained	No
Housing Material	Aluminium
Bezel Colour	White
Weight	0.3Kg

SUITABLE FOR

- Indoor applications with recessed mount option.
- Wide beam angle for open areas eg. offices and classrooms.