

Safety Information

> All electrical work must be undertaken by a qualified contractor to ensure compliance with latest edition BS7671 and IEE/IET wiring regulations.


> Before installing an LED T8 Tube or doing any maintenance, ensure power supply is turned off at the circuit breaker or fuse box.

> This product is designed for permanent connection to fixed wiring; the circuit should be protected with the appropriate MCB or fuse.

Environment

> Please DO NOT dispose of electrical items or packaging as unsorted waste. Use the recycling facilities provided by your local authorities.

PRODUCT DIMENSIONS

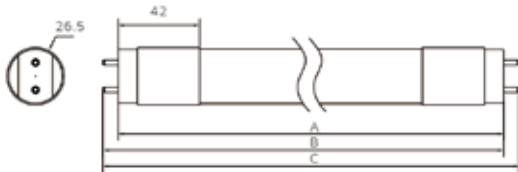

| Part Number | Dim A | Dim B | Dim C |
|---------------|--------|--------|--------|
| NET-11-02-21 | 589.9 | 595.7 | 604.0 |
| NET-11-02-23 | 1199.4 | 1205.3 | 1213.6 |
| NET-11-012-24 | 1500.0 | 1505.9 | 1514.2 |

All units are in mm


Important Warranty Information

The LED T8 Tube has a 3 year warranty, which can be extended free of charge to 5 years by registering online via the website address below. The registrant must provide the product part number and date of manufacture, which can be found on the label attached to the luminaire housing.

Manufactured in China By
Toppo Co.Ltd. NET-11-02-XX



This luminaire contains built-in LED lamps.



LED

The lamps cannot be changed in the luminaire.

874/2012



NET LED Limited
Buckingway Business Park
300 Anderson Road
Cambridge
CB24 4UQ UK
sales@netled.co.uk
www.netled.co.uk



Technical Helpline: 01223 851505
Email: support@netled.co.uk

Drawing No: NET-11-02-IG_V1
www.netled.co.uk/downloads



LED T8 TUBE INSTALLATION GUIDE

LED T8 TUBE NET-11-02-XX


KEY DATA

| Light Source: | LED | | |
|---------------------|----------------|------|------|
| Length (ft): | 2 | 4 | 5 |
| Length (mm): | 600 | 1200 | 1500 |
| Power (W): | 10W | 18W | 24W |
| Luminous Flux (lm): | 1000 | 1800 | 2400 |
| Luminous Efficacy: | 100lm/W | | |
| Colour Temperature: | 4000K | | |
| Colour Rendering: | >80CRI | | |
| Housing Material: | Polycarbonate | | |
| IP Rating: | IP20 | | |
| Manufacturer: | Toppo Lighting | | |


SUPPLY/EARTH CLASS

200-240V AC 50/60 Hz

Fig.1 Mains Input Termination




Class II

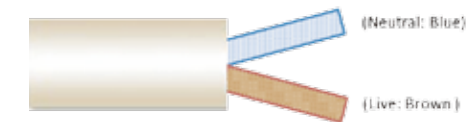


Installation procedure: Carefully read the installation instructions and ensure the mains supply is isolated before installation. Please follow the safety information overleaf before carrying out any installation. Please retain this leaflet for future reference.

For a light fitting with a magnetic ballast:

Step1: Turn off the power supply and locate the magnetic ballast in the fitting.

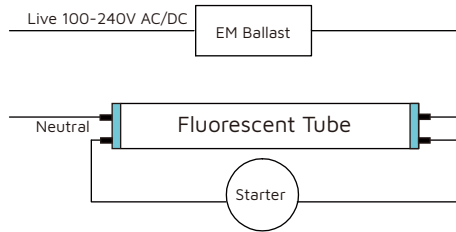


Step2: Bypass/remove the magnetic ballast along with any additional control gear or power factor correction capacitors as shown in the illustration below.

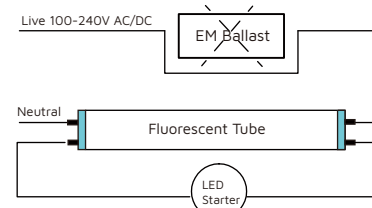

Note: A qualified electrician is required to remove/bypass the ballast from the fitting.


Step3: Rotate the end caps on the LED Tube to suit your light distribution requirements. Install the tube and switch on the power supply. Our LED tubes can be installed in any orientation.

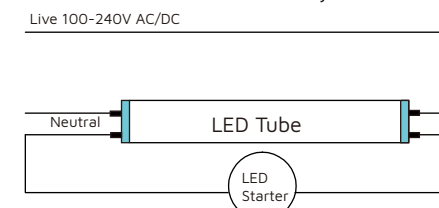


Note: All our tubes incorporate an internal thermal fuse which provides an added layer of protection for the LED Tube and the driver.

For a light fitting with an electronic ballast:

Step1: Turn off the power supply and locate the electronic ballast in the fitting.

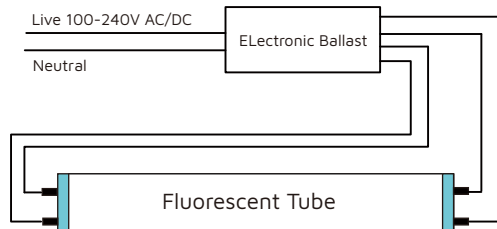


Step2: Bypass/remove the Electronic ballast along with any additional control gear or power factor correction capacitors as shown in the illustration below.

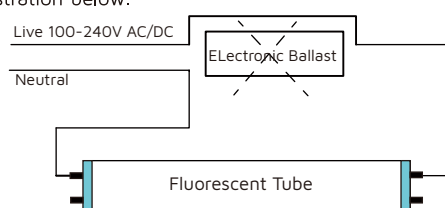

Note: A qualified electrician is required to remove/bypass the ballast from the fitting.

Step3: Finally, add a link wire as shown in the illustration below. Install the LED tube and switch on the power supply. Our LED tubes can be installed in any orientation.

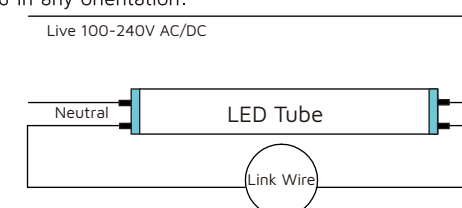

Note: All our Tubes incorporate an internal thermal fuse which provides an added layer of protection for the LED tube and the driver.

Optional additional products: A number of additional compatible products are available. To view our full range, please visit www.netled.co.uk

T8 Pre-Wired Non-Corrosive Luminaire



We supply IP65-rated (weather and dustproof) pre-wired luminaires. These can be supplied with stainless steel retaining clips (sold separately). Designed for use in industrial, storage, and outdoor environments.

Manufactured in the UK.

3 Hour Emergency Kits



We supply 3 Hour Emergency Kits for our T8 LED Tubes.

Manufactured by Lux box