

LED EMERGENCY LIGHTING

IP20 Surface Mount EM EXIT Box 4.3W 48lm




3H

Emergency Function

IES Data Files available

DIMENSIONS

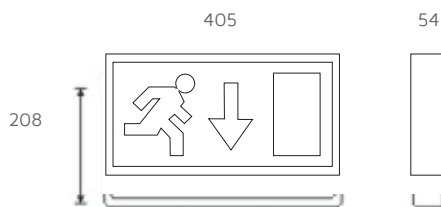

All units are in mm



Left Arrow for Surface Mount Exit Box



Right Arrow for Surface Mount Exit Box

COMPATIBLE ACCESSORIES

Left Arrow for Surface Mount Exit Box	NET-44-10-82	As above
Right Arrow for Surface Mount Exit Box	NET-44-10-83	As above

KEY DATA

Power	4.3W
Luminous Flux	48lm
Colour Temperature	6500K
IP Rating	IP20
Dimensions	390 x 190 x 60mm
Warranty	3 Years

Part Number

NET-44-10-72

FEATURES & BENEFITS

- Viewing distance 36m.
- Rear or top entry.
- Maintained or non-maintained Emergency.
- Compliant with EN 60598-2-22.

TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.9
No. of LEDs	12
Driver Manufacturer	DPPUL
Total Circuit Power (W)	4.3W +/- 0.4W
Electrical Class	1
Operating Temp.	0°C to +40°C
Lifespan _{L80}	50,000 Hours
Battery Pack	Ni-Cd SC3.6V 1800mAh
Battery Warranty	1 Year
Charge Time	24 Hours
Discharge Time	>3 Hours
Self Test	No
Maintained	Yes
Housing/Frame Material	Aluminium/Polycarbonate
Housing Colour	White
Weight	1.4Kg

SUITABLE FOR

- Indoor use on escape routes or fire exits eg. factories, workshops and warehouses.