

### Safety Information

>All electrical work must be undertaken by a qualified contractor to ensure compliance with latest edition BS 7671 and IEE/IET wiring regulations.


> Before installing an NCF Luminaire or doing any maintenance, ensure power supply is turned off at the circuit breaker or fuse box.

> This product is designed for permanent connection to fixed wiring; the circuit should be protected with the appropriate MCB or fuse.

### Environment

> Please DO NOT dispose of electrical items or packaging as unsorted waste. Use the recycling facilities provided by your local authorities.

### PRODUCT DIMENSIONS

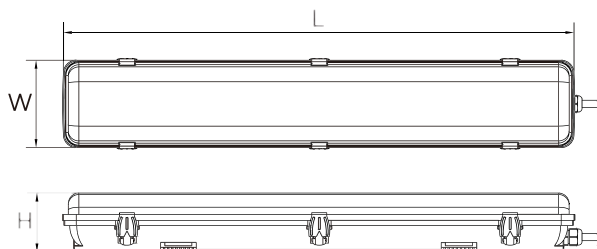

Size (mm)	L	W	H
1500	1560	130	85

All units are in mm

### Important Warranty Information

The LED NCF Luminaire has a 3 year warranty. To claim you must provide the product part number and date of manufacture, which can be found on the label attached to the luminaire housing along with the original purchase invoice.



theLIA

MEMBER



ISO 9001:2008  
FS 590684



ISO 9001:2004  
EMS 590685

NET LED Limited  
Buckingham Business Park  
300 Anderson Road  
Cambridge  
CB24 4UQ UK  
sales@netled.co.uk  
www.netled.co.uk

Technical Helpline: 01223 851505  
Email: support@netled.co.uk

Drawing No: NET-11-11-IG\_V2  
www.netled.co.uk/downloads

Distributed by



### LED NCF LUMINAIRE NET-11-11-XX

#### KEY DATA

Light Source:	LED 	
Length	5ft	
Length	1500mm	
Power	30W	60W
Luminous Flux	2880lm	5330lm
Luminous Efficacy	>85lm/W	
Colour Temperature	5500K	
Colour Rendering	>80 CRI	
Housing Material	ABS	
Diffuser Material	Polycarbonate	
IP Rating	IP65	
Manufacturer	Toppo Lighting Co	


#### SUPPLY/EARTH CLASS

220-240V AC 50/60 Hz



Class I

Fig.1 Mains Input Termination

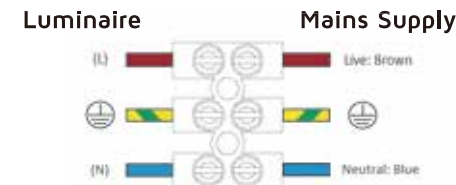


**Installation procedure:** Carefully read the installation instructions and ensure the mains supply is isolated before installation. Please read the safety information overleaf before carrying out any installation. Please retain this leaflet for future reference.

### LED NCF Luminaire Installation:


**Step 1:** Carefully remove LED NCF Luminaire from the packaging. Undo the stainless steel clips to remove the diffuser. Lift the LED tray to access the accessories bag inside the LED tray housing. Fix the supplied metal clips on to a mounting surface as per the illustration below.




**Step 2:** Wire the supply through the cable gland to the terminal block inside the housing. The terminal block can be accessed by lifting the LED tray.

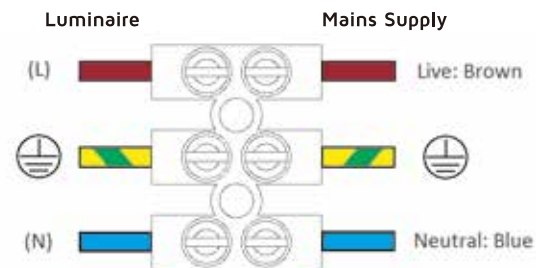

**Step 3:** Replace the diffuser and lock the stainless steel clips. Align the luminaire with the mounting clips and push it into place.

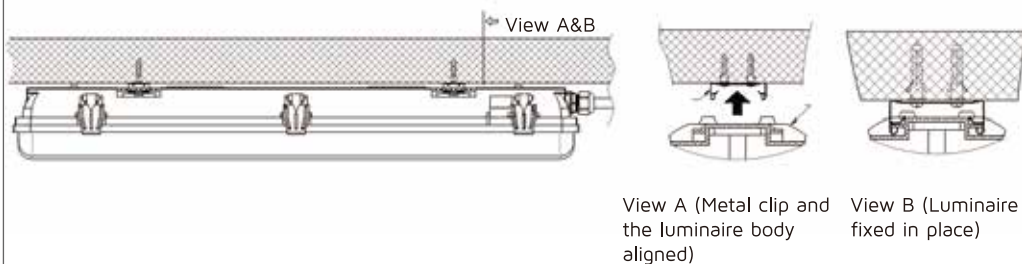

**Step 4:** Turn on the mains supply to test the luminaire is working properly.

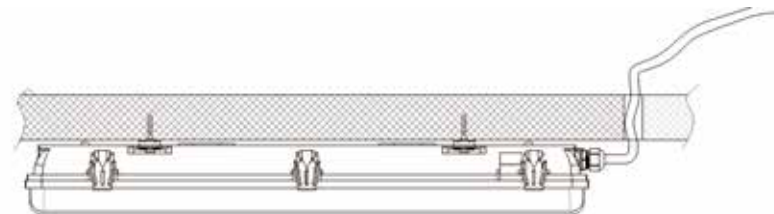

### Optional additional products:

LED NCF luminaires are compatible with 3 Hour Emergency Kits, maintaining the units in emergency situations for 3 hours. The emergency kit is designed to sit within the unit behind the LED tray.



### Full product range available

See [www.netled.co.uk](http://www.netled.co.uk) for more commercial LED lighting products, including

Panel Lights, Downlights, T5 and T8 Tubes, Flood Lights, 2D Bulkheads and retrofit Gear Trays, Non-Corrosive Luminaires, High Bays and much more.