

LED EMERGENCY LIGHTING


IP20 Suspended EM EXIT Sign 2W 20lm



Emergency Function

IES Data Files available

DIMENSIONS

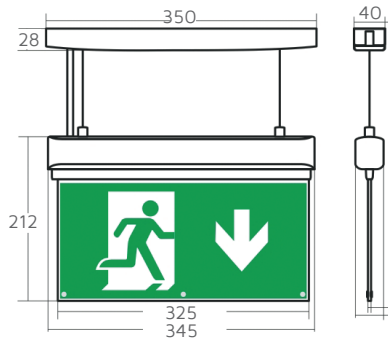

All units are in mm



Left Arrow for Suspended Exit Sign



Right Arrow for Suspended Exit Sign

COMPATIBLE ACCESSORIES

Left Arrow for Suspended Exit Sign	NET-44-10-84	As above
Right Arrow for Suspended Exit Sign	NET-44-10-85	As above

KEY DATA

Power	2W
Luminous Flux	20lm
Colour Temperature	6500K
IP Rating	IP20
Dimensions	350 x 40 x 240mm
Warranty	3 Years

Part Number

NET-44-10-74

FEATURES & BENEFITS

- Viewing distance 30m.
- Surface mount.
- Maintained or non-maintained Emergency.
- Compliant with EN 60598-2-22.

TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.9
No. of LEDs	15
Driver Manufacturer	DPPUL
Total Circuit Power (W)	2W +/- 0.2W
Electrical Class	1
Operating Temp.	0°C to +40°C
Lifespan _{L80}	50,000 Hours
Battery Pack	Ni-Cd AA 3.6V 800 mAh
Battery Warranty	1 Year
Charge Time	24 Hours
Discharge Time	>3 Hours
Self Test	No
Maintained	Yes
Housing/Frame Material	Aluminium / Polycarbonate
Housing Colour	White
Weight	0.7Kg

SUITABLE FOR

- Indoor use on escape routes or fire exists eg. offices, canteens and reception areas.