

LED TUBES

T5 Aluminium and Polycarbonate
1ft, 2ft, 3ft, 4ft, 5ft



T5 288mm (1ft)

Power	6W
Luminous Flux	500lm
Colour Temperature	5500K
IP Rating	IP20
Dimensions	302.5 x 22mm
Warranty	5 Years Extended

Part Number **NET-11-01-03**

T5 849mm (3ft)

Power	12W
Luminous Flux	1000lm
Colour Temperature	5500K
IP Rating	IP20
Dimensions	863.2 x 22mm
Warranty	5 Years Extended

Part Number **NET-11-01-07**

T5 1449mm (5ft)

Power	20W
Luminous Flux	1850lm
Colour Temperature	5500K
IP Rating	IP20
Dimensions	1463.2 x 22mm
Warranty	5 Years Extended

Part Number **NET-11-01-11**

T5 549mm (2ft)

Power	10W
Luminous Flux	900lm
Colour Temperature	5500K
IP Rating	IP20
Dimensions	563.2 x 22mm
Warranty	5 Years Extended

Part Number **NET-11-01-05**

T5 1148mm (4ft)

Power	15W
Luminous Flux	1450lm
Colour Temperature	5500K
IP Rating	IP20
Dimensions	1163.2 x 22mm
Warranty	5 Years Extended


Part Number **NET-11-01-09**

TECHNICAL SPECIFICATIONS (ALL MODELS)

Input Voltage AC	100-240V
Power Factor	>0.95
Luminous Efficacy	>85lm/W
LED Manufacturer	Honglitronic
LED Type	SMD 2835
Driver Manufacturer	Lifud
Driver Output Voltage DC	36-42V
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan	50,000 Hours
Fire Rating	V-2
UGR Rating	22
End Cap Style	G5
Diffuser Material	Polycarbonate
Housing Material	Aluminium

IES Data Files available

DIMENSIONS

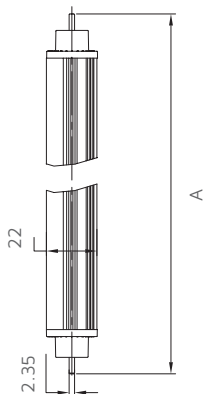

Part Number	Dim A
NET-11-01-03	302.5
NET-11-01-05	563.2
NET-11-01-07	863.2
NET-11-01-09	1163.2
NET-11-01-11	1463.2

All units are in mm

COMPATIBLE ACCESSORIES

Rotatable end caps as standard

3H Tube EMKIT

NET-21-33-01

Page 236

DALI 3H Tube EMKIT

NET-19-33-17

Page 240