



LED GEAR TRAYS

Emergency 16W

Tri-Colour 3000K, 4000K and 5500K 1900lm

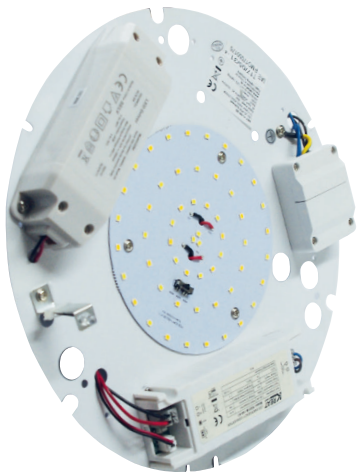


Tri-Colour



Emergency Function

IES Data Files available

DIMENSIONS

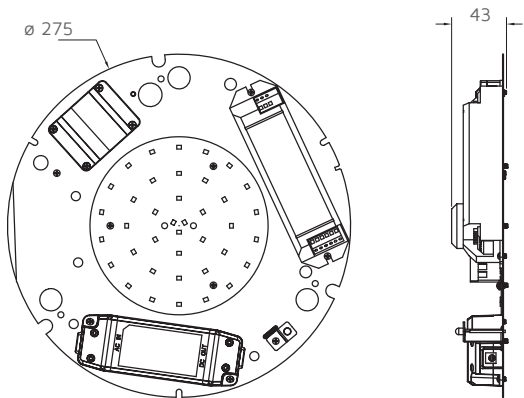

All units are in mm

KEY DATA

Power	16W
Luminous Flux	1650lm / 1900lm / 1650lm
Colour Temperature	3000K / 4000K / 5500K
IP Rating	No
Dimensions	ø 275 x 43mm
Warranty	3 Years

Part Number

NET-11-06-32

TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.9
LED Luminous Flux	1900lm
Luminous Efficacy	110-125lm/W
LED Manufacturer	Honglitronic
LED Type	SMD2835
No. of LEDs	26 x 2+3
Driver Manufacturer	Lifud
Driver Output Voltage DC	36-42V
Total Circuit Power (W)	16W +/-1.5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	115°
Dimmable	No
Emergency Operation	3 Hours
Battery Pack	Li-on 3.7V
Emergency Pack	KREAT
Battery Warranty	1 Year
Emergency Lumens	150lm
Operating Temp.	0°C to +45°C
Lifespan	35,000 Hours
Fire Rating	N/A
UGR Rating	More than 19
Diffuser Material	N/A
Housing Material	N/A
Housing Colour	White
Weight	0.54Kg

COMPATIBLE ACCESSORIES

IP65 Aluminium Housing	NET-11-06-10	Page 130
Half Moon Cover for 11-06-10	NET-11-06-25	Page 130
White IP65 PC Housing	NET-11-06-49	Page 131
Black IP65 PC Housing	NET-11-06-51	Page 131

TYPICALLY REPLACES

- 28W fluorescent 2D lamp.

FEATURES & BENEFITS

- Multiple mounting points for retro fit into existing housings.
- Maintained or non-maintained emergency operation.
- Compliant with EN 60598-2-22.