


LED BATTENS

1500mm 22W (5ft)

Tri-Colour 3000K, 4000K and 5500K 2850lm




Tri-Colour



IES Data Files available



DIMENSIONS

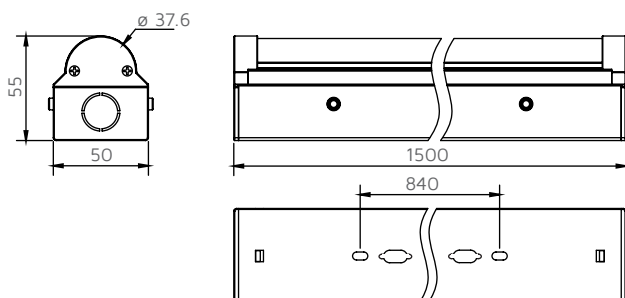

All units are in mm



UK Emergency conversion
by Lux box Lighting Ltd

COMPATIBLE ACCESSORIES

Batten/NCF Suspension Kit

NET-46-16-04

Page 228

20mm Microwave Sensor

NET-42-43-20

Page 211

KEY DATA

Power	22W
Luminous Flux	2770lm / 2850lm / 2760lm
Colour Temperature	3000K / 4000K / 5500K
IP Rating	IP20
Dimensions	1500 x 50 x 55mm
Warranty	5 Years Extended

Part Number

NET-11-11-93

Part Number EM

NET-11-11-94

TECHNICAL SPECIFICATIONS

Input Voltage AC	100-240V
Power Factor	>0.95
LED Luminous Flux	2880lm
Luminous Efficacy	>131lm/W
LED Manufacturer	Honglitronic
LED Type	SMD 2835
No. of LEDs	182 x 2
Driver Manufacturer	Lifud
Driver Output Voltage DC	36-42V
Total Circuit Power (W)	22W +/-2W
Electrical Class	1
Emergency Operation*	>3H
Battery Pack*	LiFePO ₄
Emergency Conversion*	Luxbox
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker free	No
Operating Temp.	-15°C to +45°C
Operating Temp. EM	0°C to +45°C
Lifespan	50,000 Hours
Fire Rating	V-0
UGR Rating	22
Diffuser Material	Polycarbonate
Housing Material	Aluminium
Housing Colour	White
Weight	1.25Kg

*Emergency version only

TYPICALLY REPLACES

- 1 x 58W T8 fluorescent.
- 1 x 35W T5 fluorescent.

FEATURES & BENEFITS

- Rear and end cable entry options. Simple clip design and interlocking power cord for easy installation.
- Flat end allows for end-to-end light designs.
- Compliant with EN 60598-2-1.