


## LED BATTENS

1500mm 45W (5ft)

Tri-Colour 3000K, 4000K and 5500K 5930lm




### Tri-Colour



IES Data Files available



### DIMENSIONS

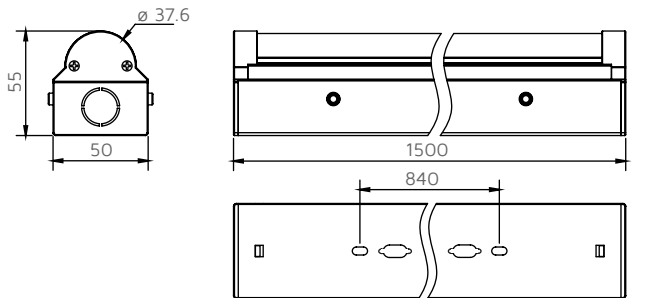

All units are in mm



UK Emergency conversion  
by Lux box Lighting Ltd

### COMPATIBLE ACCESSORIES

Batten/NCF Suspension Kit	NET-46-16-04	Page 228
20mm Microwave Sensor	NET-42-43-20	Page 211

### KEY DATA

Power	45W
Luminous Flux	5320lm / 5930lm / 5610lm
Colour Temperature	3000K / 4000K / 5500K
IP Rating	IP20
Dimensions	1500 x 50 x 55mm
Warranty	5 Years Extended

Part Number	NET-11-11-96
Part Number EM	NET-11-11-95

### TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.95
LED Luminous Flux	6100lm
Luminous Efficacy	>132lm/W
LED Manufacturer	Honglitronic
LED Type	SMD 2835
No. of LEDs	208 x 2
Driver Manufacturer	Lifud
Driver Output Voltage DC	36-42V
Total Circuit Power (W)	45W +/-2W
Electrical Class	1
Emergency Operation*	>3H
Battery Pack*	LiFePO4
Emergency Conversion*	Luxbox
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker free	No
Operating Temp.	-15°C to +45°C
Operating Temp. EM	0°C to +45°C
Lifespan	50,000 Hours
Fire Rating	V-0
UGR Rating	22
Diffuser Material	Polycarbonate
Housing Material	Aluminium
Housing Colour	White
Weight	1.26Kg

\*Emergency version only

### TYPICALLY REPLACES

- 2 x 58W T8 fluorescent.
- 2 x 35W T5 fluorescent.

### FEATURES & BENEFITS

- Rear and end cable entry options.
- Simple clip design and interlocking power cord for easy installation.
- Flat end allows for end-to-end light designs.
- Compliant with EN 60598-2-1.