

# LED SLIMLINE FLOOD LIGHTS

80W

6000K 7100lm



Compatible accessories:




PIR  
Motion Sensor

Photocell  
Sensor

IES Data Files available

## DIMENSIONS

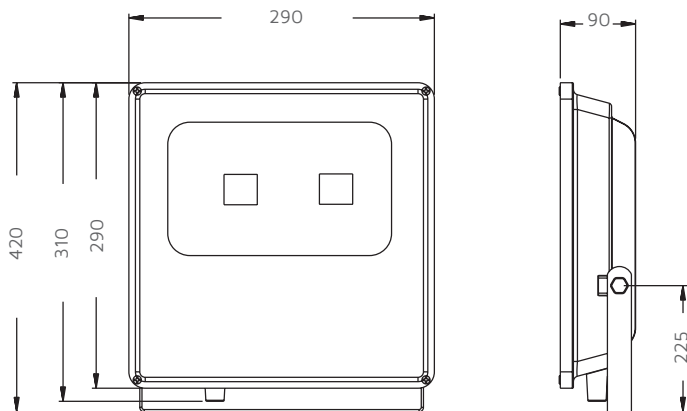

All units are in mm



360 Degree Bracket

## COMPATIBLE ACCESSORIES

PIR Sensor	NET-15-04-39	Page 153
Photocell	NET-15-04-49	Page 153
360 Degree Bracket	NET-15-16-15	As above

## KEY DATA

Power	80W
Luminous Flux	7100lm
Colour Temperature	6000K
IP Rating	IP66
IK Rating	IK08
Dimensions	290 x 290 x 90mm
Warranty	3 Years

Part Number

NET-15-04-37

## TECHNICAL SPECIFICATIONS

Input Voltage AC	100-240V
Power Factor	>0.90
LED Luminous Flux	8800lm
Luminous Efficacy	>110lm/W
LED Manufacturer	Elec -Tech
LED Type	35mil
No. of LEDs	2 X 40W
Driver Manufacturer	Leyond
Driver Output Voltage DC	30-36V
Total Circuit Power (W)	80W +/-5W
Electrical Class	1
Colour Rendering	>75 CRI
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan	35,000 Hours
UGR Rating	22
Diffuser Material	Glass
Housing Material	Aluminium
Housing/Frame Colour	Black
Weight	3.0Kg

## TYPICALLY REPLACES

- 150W metal halide.

## FEATURES & BENEFITS

- Weather and dust-proof IP66 rated housing.
- Optional 360 Degree Bracket.
- Anti-corrosive paint treatment.
- Optional plug in PIR and Photocell.
- Supplied with 1m flex.
- Compliant with EN 60598-2-5.