

## LED NCF LUMINAIRES

1500mm 40W (5ft)


5500K 4890lm



**PHILIPS**  
DRIVER AS STANDARD

IES Data Files available

### DIMENSIONS

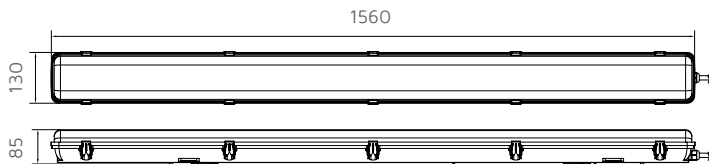

All units are in mm

### KEY DATA

Power	40W
Luminous Flux	4890lm
Colour Temperature	5500K
IP Rating	IP65
IK Rating	IK08
Dimensions	1560 x 130 x 85mm
Warranty	5 Years Extended

Part Number

NET-11-11-05

### TECHNICAL SPECIFICATIONS

Input Voltage AC	200-240V
Power Factor	>0.95
LED Luminous Flux	5724lm
Luminous Efficacy	140lm/W
LED Manufacturer	Honglitrionic
LED Type	SMD 2835
No. of LEDs	240
Driver Manufacturer	Philips
Driver Output Voltage DC	36-42V
Total Circuit Power (W)	40W +/- 2W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker free	Yes
Operating Temp.	-0°C to +45°C
Lifespan	50,000 Hours
Fire Rating	V-2
UGR Rating	More than 19
Diffuser Material	Polycarbonate
Housing Material	Polycarbonate
Housing Colour	Grey
Weight	2.9Kg

### TYPICALLY REPLACES

- 1 x 70W fluorescent.

### FEATURES & BENEFITS

- Weather and dust-proof IP65 rated housing.
- Stainless steel retaining clips.
- Easy-mounting clips.
- Compliant with EN 60598-2-1.
- Internal mounting plate for daylight and microwave sensor.
- High lumens per watt.

### COMPATIBLE ACCESSORIES

Batten/NCF Suspension Kit	NET-46-16-04	Page 228
20mm Microwave Sensor	NET-42-43-20	Page 211
Internal Microwave Sensor	NET-42-43-02	Page 210
Internal Daylight Switch	NET-42-43-10	Page 215
LED Non-Corrosive Emergency Kit	NET-21-33-09	Page 237
Tamper-proof clips	NET-11-16-23	Page 86