


**LED NCF LUMINAIRES**  
 1500mm 55W (5ft)  
 5500K 7440lm



IES Data Files available

**DIMENSIONS**

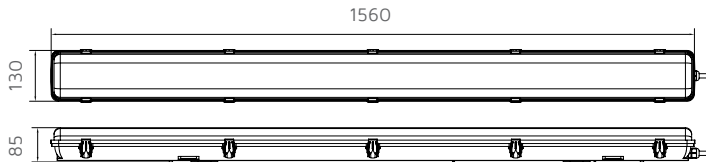

All units are in mm

**KEY DATA**

Power	55W
Luminous Flux	7440lm
Colour Temperature	5500K
IP Rating	IP65
IK Rating	IK08
Dimensions	1560 x 130 x 85mm
Warranty	5 Years Extended

Part Number

**NET-11-11-07**

**TECHNICAL SPECIFICATIONS**

Input Voltage AC	200-240V
Power Factor	>0.95
LED Luminous Flux	8710lm
Luminous Efficacy	135lm/W
LED Manufacturer	Honglitricon
LED Type	SMD 2835
No. of LEDs	324
Driver Manufacturer	Boke
Driver Output Voltage DC	36-42V
Total Circuit Power (W)	55W +/- 5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker free	Yes
Operating Temp.	-15°C to +45°C
Lifespan	50,000 Hours
Fire Rating	V-2
UGR Rating	More than 19
Diffuser Material	Polycarbonate
Housing Material	Polycarbonate
Housing Colour	Grey
Weight	3.0 Kg

**TYPICALLY REPLACES**

- 2 x 58W T8 fluorescent.
- 2 x 35W T5 fluorescent.

**FEATURES & BENEFITS**

- Weather and dust-proof IP65 rated housing.
- Stainless steel retaining clips.
- Easy-mounting clips.
- Compliant with EN 60598-2-1.
- Internal mounting plate for daylight and microwave sensor.
- High lumens per watt.

**COMPATIBLE ACCESSORIES**

Batten/NCF Suspension Kit	<b>NET-46-16-04</b>	Page 228
20mm Microwave Sensor	<b>NET-42-43-20</b>	Page 211
Internal Microwave Sensor	<b>NET-42-43-02</b>	Page 210
Internal Daylight Switch	<b>NET-42-43-10</b>	Page 215
LED Non-Corrosive Emergency Kit	<b>NET-21-33-09</b>	Page 237
Tamper-proof clips	<b>NET-11-16-23</b>	Page 86