

LED NCF LUMINAIRES

1500mm 75W (5ft)


5500K 9290lm



PHILIPS
DRIVER AS STANDARD

IES Data Files available

DIMENSIONS

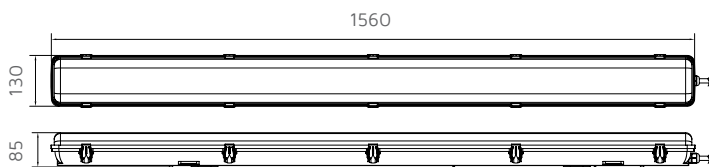

All units are in mm

KEY DATA

Power	75W
Luminous Flux	9290lm
Colour Temperature	5500K
IP Rating	IP65
IK Rating	IK08
Dimensions	1560 x 130 x 85mm
Warranty	5 Years Extended

Part Number

NET-11-11-11

TECHNICAL SPECIFICATIONS

Input Voltage AC	200-240V
Power Factor	>0.95
LED Luminous Flux	10915lm
Luminous Efficacy	140lm/W
LED Manufacturer	Honglitrionic
LED Type	SMD 2835
No. of LEDs	416
Driver Manufacturer	2 x Philips 40W
Driver Output Voltage DC	36-42V
Total Circuit Power (W)	75W +/- 5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker free	Yes
Operating Temp.	-0°C to +45°C
Lifespan	50,000 Hours
Fire Rating	V-2
UGR Rating	More than 19
Diffuser Material	Polycarbonate
Housing Material	Polycarbonate
Housing Colour	Grey
Weight	3.1Kg

TYPICALLY REPLACES

- 2 x 70W T8 fluorescent.

FEATURES & BENEFITS

- Weather and dust-proof IP65 rated housing.
- Stainless steel retaining clips.
- Easy-mounting clips.
- Compliant with EN 60598-2-1.
- Internal mounting plate for daylight and microwave sensor.
- High lumens per watt.

COMPATIBLE ACCESSORIES

Batten/NCF Suspension Kit	NET-46-16-04	Page 228
20mm Microwave Sensor	NET-42-43-20	Page 211
Internal Microwave Sensor	NET-42-43-02	Page 210
Internal Daylight Switch	NET-42-43-10	Page 215
LED Non-Corrosive Emergency Kit	NET-21-33-09	Page 237
Tamper-proof clips	NET-11-16-23	Page 86