

LYNXUS WIRELESS AREA CONTROLLER AND TABLET



Through the use of the Lynxus hub, tablet and app you can control, schedule and automate the delivery of light.


KEY DATA

Number of Interfaces	80 Max
Input Voltage AC	5V DC
Compatibility	Zigbee Pro
Radio Properties	2.4GHz +19.5 dBm
Operating Temp.	-20°c to +65°c
IP Rating	IP54
Dimensions	106 x 106 x 25mm
Warranty	3 Years

Part Number

NET-48-16-02

LYNXUS ZIGBEE LUMINAIRE INTERFACE Communication Module

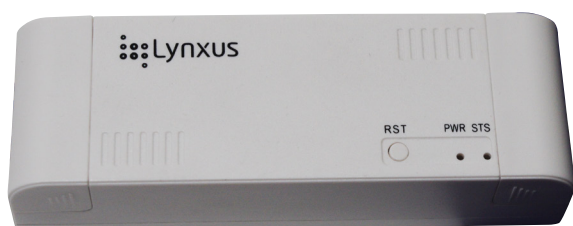

KEY DATA

Input Voltage AC	110-240V
Power Frequency	50Hz
Maximum Load	2400W
Compatibility	Zigbee H.A 1.2
Radio Properties	2.4GHz +19.5 dBm
Operating Temp.	-25°c to +65°c
Dimming Control	1 - 10V Max 8 Luminaires
IP Rating	IP54
Dimensions	102 x 41 x 24mm
Warranty	3 Years

Part Number

NET-48-16-01

LYNXUS ZIGBEE WIRELESS SWITCH Single Switch



KEY DATA

Input Voltage AC	200-240V
Compatibility	ZigBee H.A.1.2
Radio Properties	2.4GHz +19.5 dBm
Operating Temp.	-20°c to +65°c
IP Rating	IP20
Dimensions	88 x 90 x 25mm
Warranty	3 Years

Part Number

NET-48-16-03