


LED SURFACE LINEARS

Emergency 1500mm (5ft) 30W (4210lm) / 50W (6470lm)

Emergency
FunctionDual
WattageDimmable
as standard

Tri-Colour




Warm Cool Daylight



IES Data Files available

DIMENSIONS

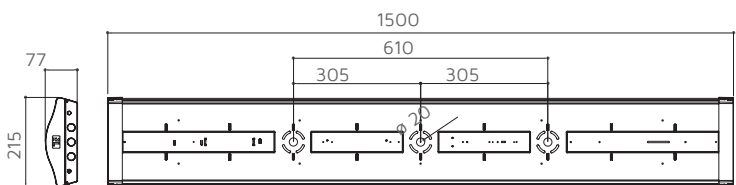

All units are in mm

UK Emergency conversion
by Lux box Lighting Ltd

COMPATIBLE ACCESSORIES

Internal Daylight Switch

NET-42-43-10

Page 241

KEY DATA

Power	30W / 50W
Luminous Flux 30W	4090lm / 4210lm / 4270lm
Luminous Flux 50W	6190lm / 6470lm / 6480lm
Colour Temperature	3000K / 4000K / 5500K
IP Rating	IP20
Dimensions	1500 x 215 x 77mm
Warranty	5 Years (Registration Required)

Part Number

NET-11-11-67

FEATURES & BENEFITS

- Selectable 3000K, 4000K or 5500K colour temperature via switch.
- Dual wattage (30W or 50W) allows the power to be set at the time of installation.
- Rear or end cable entry.
- Compliant with EN 60598-2-1 / Emergency EN 60598-2-22.

TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.9
Luminaire Efficacy	140lm/W
LED Manufacturer	Honglitrionic
LED Type	SMD 2835
No. of LEDs	286 x 2
Driver Manufacturer	BOKE
Driver Output Voltage DC	36-42V
Total Circuit Power (W)	30W / 50W +/-5W
Electrical Class	1
Emergency Operation	>3H
Battery Pack	LiFePO4
Emergency Conversion	Luxbox
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	1 to 10V As Standard
Flicker Free	No
Operating Temp.	-15°C to +45°C
Operating Temp. EM	0°C to +45°C
Lifespan _{L80}	50,000 Hours
Fire Rating	V-2
UGR Rating	22
Diffuser Material	PC
Housing Material	SPCC
Housing Colour	White
Weight	3.2Kg