


## LED IP65 BULKHEADS

Standard 16W 1450lm





### Tri-Colour



Central Entry

IES Data Files available

### DIMENSIONS

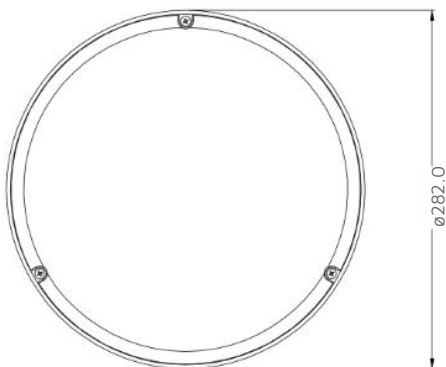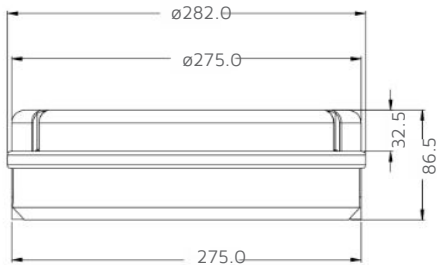

All units are in mm

### TYPICALLY REPLACES

- 28W fluorescent 2D Bulkhead.

### KEY DATA

Power	16W
Luminous Flux	1250lm / 1450lm / 1250lm
Colour Temperature	3000K / 4000K / 5500K
IP Rating	IP65
IK Rating	IK10
Dimensions	ø282 x 86.5mm
Warranty	3 Years

Part Number White

NET-11-06-52

Part Number Black

NET-11-06-53

### FEATURES & BENEFITS

- Water and dust-resistant IP65 rated housing.
- Shatterproof all-polycarbonate diffuser.
- Raised mounting plate.
- Compliant with EN 60598-2-1.

### TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.9
Luminaire Efficacy	91lm/W
LED Manufacturer	Honglitricon
LED Type	SMD2835
No. of LEDs	26 x 2
Driver Manufacturer	Lifud
Driver Output Voltage DC	36-42V
Total Circuit Power (W)	16W +/-1.5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	115°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan <sub>L80</sub>	35,000 Hours
Fire Rating	V-0
UGR Rating	More Than 19
Diffuser Material	Polycarbonate
Housing Material	Polycarbonate
Weight	0.91Kg