


LED PANEL LIGHTS
 32W 600x600mm
 4000K 3610lm



IES Data Files available

DIMENSIONS

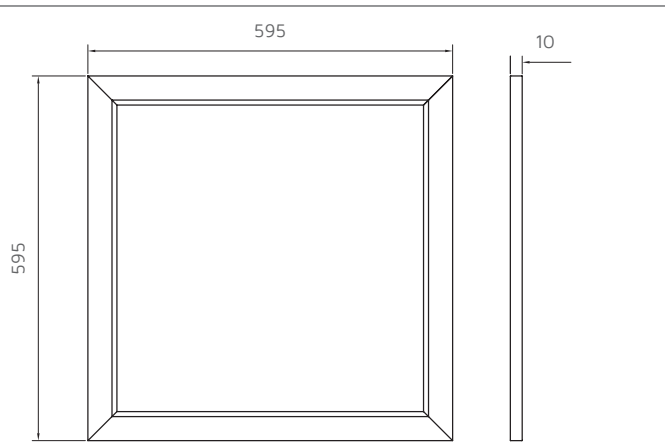

All units are in mm

KEY DATA

Power	32W
Luminous Flux	3610lm
Colour Temperature	4000K
IP Rating	IP40
Dimensions	595 x 595 x 10mm
Warranty	5 Years Extended

Part Number

NET-11-03-86

TECHNICAL SPECIFICATIONS

Input Voltage AC	200-240V
Power Factor	>0.95
LED Luminous Flux	4160lm
Luminous Efficacy	130lm/W
LED Manufacturer	Honglitrionic
LED Type	4014
No. of LEDs	234
Driver Manufacturer	BOKE
Driver Output Voltage DC	30-42V
Total Circuit Power (W)	32W +/-5W
Electrical Class	3
Colour Rendering	>80 CRI
Lamp Viewing Angle	115°
Dimmable	Optional Upgrade
Flicker free	Yes
Operating Temp.	-15°C to +45°C
Lifespan	35,000 Hours
Diffuser Flammability Rating	TP(b)
UGR Rating	More than 19
Diffuser/LGP Material	PS/PMMA
Housing Material	Aluminium
Frame Colour	Silver
Weight	2.84Kg

COMPATIBLE ACCESSORIES

40W Dimmable Driver	NET-42-43-16	Page 220
Suspension Kit	NET-46-16-02	Page 228
Surface Mount box	NET-11-03-39	Page 232
3H PNL EMKIT	NET-21-33-03	Page 236
DALI EMKIT	NET-19-33-15	Page 240

TYPICALLY REPLACES

- 4 x 18W T8 fluorescent.
- 4 x 14W T5 fluorescent.
- 1 x 55W 2G11 fluorescent.

FEATURES & BENEFITS

- Single colour temperature 4000K
- White frame
- Flicker-Free Driver
- Compliant with EN 60598-2-2.
- High lumens per watt.
- Engineered back plate for rigidity.
- Multi layered wave path guide for even light distribution.