


LED WATERPROOFS
1500mm 51W (5ft)
4000K 6000lm



IES Data Files available

DIMENSIONS

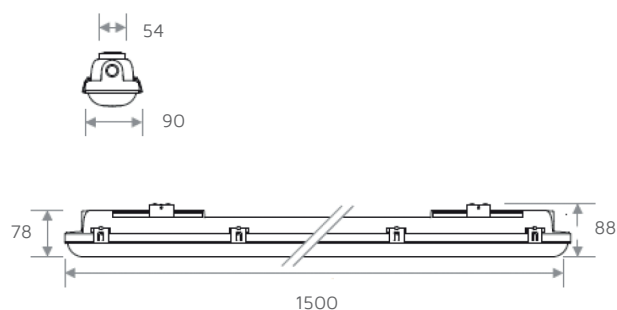

COMPATIBLE ACCESSORIES

Batten/NCF Suspension Kit

NET-46-16-04

Page 228

KEY DATA

| | |
|--------------------|------------------|
| Power | 51W |
| Luminous Flux | 6000lm |
| Colour Temperature | 4000K |
| IP Rating | IP65 |
| Dimensions | 1500 x 90 x 78mm |
| Warranty | 5 Years Extended |

Part Number

NET-40-16-63

TECHNICAL SPECIFICATIONS

| | |
|-----------------------------|----------------|
| Input Voltage AC | 220-240V |
| Power Factor | >0.9 |
| Input Frequency | 50/60Hz |
| Luminaire Luminous Efficacy | 115lm/W |
| Colour Rendering | >82 CRI |
| Lamp Viewing Angle | 110° |
| Dimmable | No |
| Flicker free | No |
| Operating Temp. | -30°C to +40°C |
| Lifespan | 50,000 Hours |
| IK Rating | 8 |
| Diffuser Material | Polycarbonate |
| Housing/Frame Colour | Grey |
| Weight | 2.2kg |

TYPICALLY REPLACES

- 2 x 58W T8 fluorescent.
- 2 x 49W T5 fluorescent.

FEATURES & BENEFITS

- Stainless clips as standard.
- IK08 Rated Impact resistant.
- Compliant with EN 60598-2-1.

Product Summary

| Part Number | Range | Description/Dimensions | Power | Colour Temp. | Lumens | Page |
|--------------|-----------|------------------------|-------|--------------|--------|------|
| NET-40-16-74 | Essential | 4 ft LG LED Waterproof | 35W | 4000K | 4000lm | 96 |
| NET-40-16-63 | Essential | 5 ft LG LED Waterproof | 51W | 4000K | 6000lm | 97 |