


LED NCF LUMINAIRES
 1500mm 30W (5ft)
 5500K 2880lm



IES Data Files available

DIMENSIONS

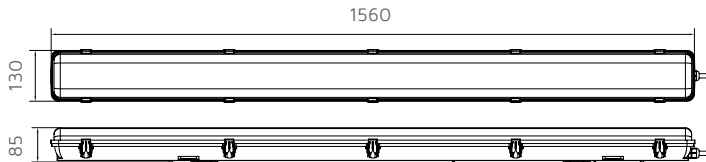

All units are in mm

KEY DATA

Power	30W
Luminous Flux	2880lm
Colour Temperature	5500K
IP Rating	IP65
Dimensions	1560 x 130 x 85mm
Warranty	3 Years

Part Number

NET-11-11-23

TECHNICAL SPECIFICATIONS

Input Voltage AC	200-240V
Power Factor	>0.9
LED Luminous Flux	3110lm
Luminous Efficacy	90lm/W
LED Manufacturer	Honglitricon
LED Type	SMD2835
No. of LEDs	156
Driver Manufacturer	Boke
Driver Output Voltage DC	36-42V
Total Circuit Power (W)	30W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker free	No
Operating Temp.	-15°C to +45°C
Lifespan	35,000 Hours
Fire Rating	V-2
UGR Rating	More than 19
Diffuser Material	Polycarbonate
Housing Material	ABS
Housing Colour	Grey
Weight	2.2Kg

COMPATIBLE ACCESSORIES

Batten/NCF Suspension Kit	NET-46-16-04	Page 228
20mm Microwave Sensor	NET-42-43-20	Page 211
Internal Microwave Sensor	NET-42-43-02	Page 210
Internal Daylight Switch	NET-42-43-10	Page 215
LED Non-Corrosive Emergency Kit	NET-21-33-09	Page 237
Tamper-proof clips	NET-11-16-23	Page 86

TYPICALLY REPLACES

- 1 x 58W T8 fluorescent.
- 1 x 35W T5 fluorescent.

FEATURES & BENEFITS

- Weather and dust-proof IP65 rated housing.
- Tamper-proof stainless steel retaining clips.
- Easy-mounting clips.
- Compliant with EN 60598-2-1.