

LED SLIM NCF LUMINAIRES

1500mm 25W (5ft) 5500K 2950lm



Emergency Function



KEY DATA

Power	25W
Luminous Flux	2950lm
Colour Temperature	5500K
IP Rating	IP65
IK Rating	IK08
Dimensions	1560 x 70 x 75mm
Warranty	3 Years


Part Number	NET-11-11-23
Part Number EM	NET-11-12-23

FEATURES & BENEFITS

- Weather and dust-proof IP65 rated housing.
- Stainless steel retaining clips.
- Easy-mounting clips.
- Compliant with EN 60598-2-1 / Emergency EN 60598-2-22.

IES Data Files available

DIMENSIONS

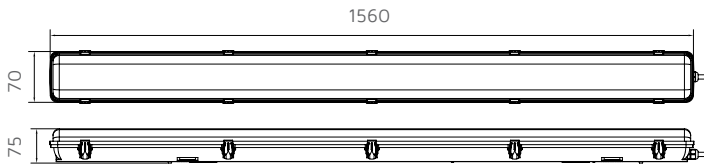

All units are in mm

TYPICALLY REPLACES

- 1 x 58W T8 fluorescent.
- 1 x 35W T5 fluorescent.



UK Emergency conversion by Lux box Lighting Ltd

COMPATIBLE ACCESSORIES

Batten/NCF Suspension Kit	NET-46-16-04	Page 258
20mm Microwave Motion Sensor	NET-42-43-20	Page 245

TECHNICAL SPECIFICATIONS

Input Voltage AC	200-240V
Power Factor	>0.9
Luminaire Efficacy	118lm/W
LED Manufacturer	Honglitrionic
LED Type	SMD2835
No. of LEDs	182
Driver Manufacturer	BOKE
Driver Output Voltage DC	36-42V
Total Circuit Power (W)	25W +/-2W
Electrical Class	1
Emergency Operation*	>3H
Battery Pack*	LiFePO4 3.2V 4.5Ah
Emergency Conversion*	Luxbox
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker Free	No
Operating Temp.	-15°C to +45°C
Operating Temp. EM	0°C to +45°C
Lifespan _{L80}	35,000 Hours
Fire Rating	V-2
UGR Rating	More than 19
Diffuser Material	Polycarbonate
Housing Material	ABS
Housing Colour	Grey
Weight	2.2Kg

*Emergency version only