

LED SLIM NCF LUMINAIRES

1500mm 50W (5ft) w5500K 5550lm




3H

Emergency
Function

BOKE
DRIVER AS STANDARD

IES Data Files available

DIMENSIONS

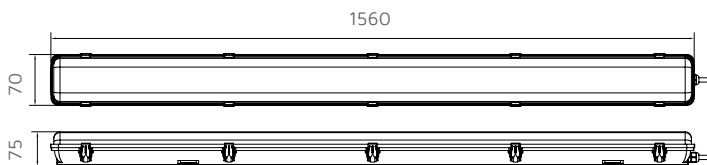

All units are in mm

TYPICALLY REPLACES

- 2 x 58W T8 fluorescent.
- 2 x 35W T5 fluorescent.

LUXBOX
LIGHTING TECHNOLOGY

UK Emergency conversion
by Lux box Lighting Ltd

COMPATIBLE ACCESSORIES

Batten/NCF Suspension Kit	NET-46-16-04	Page 258
20mm Microwave Motion Sensor	NET-42-43-20	Page 245

KEY DATA

Power	50W
Luminous Flux	5550lm
Colour Temperature	5500K
IP Rating	IP65
IK Rating	IK08
Dimensions	1560 x 70 x 75mm
Warranty	3 Years

Part Number **NET-11-11-25**

Part Number EM **NET-11-12-25**

FEATURES & BENEFITS

- Weather and dust-proof IP65 rated housing.
- Stainless steel retaining clips.
- Easy-mounting clips.
- Compliant with EN 60598-2-1 / Emergency EN 60598-2-22.

TECHNICAL SPECIFICATIONS

Input Voltage AC	220-240V
Power Factor	>0.9
Luminaire Efficacy	111lm/W
LED Manufacturer	Honglitrionic
LED Type	SMD2835
No. of LEDs	312
Driver Manufacturer	BOKE
Driver Output Voltage DC	27-40V
Total Circuit Power (W)	50W +/- 5W
Electrical Class	1
Emergency Operation*	>3H
Battery Pack*	LiFePO4 3.2V 4.5Ah
Emergency Conversion*	Luxbox
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker Free	No
Operating Temp.	-15°C to +45°C
Operating Temp. EM	0°C to +45°C
Lifespan _{L80}	35,000 Hours
Fire Rating	V-2
UGR Rating	More than 19
Diffuser Material	Polycarbonate
Housing Material	ABS
Housing Colour	Grey
Weight	2.6Kg

*Emergency version only