

STREET LIGHTING

60W
4000K 7310lm



Requires Spigot Adapter
for 60mm pole

PHILIPS


LED CHIPS



DRIVER AS STANDARD

IES Data Files available

DIMENSIONS

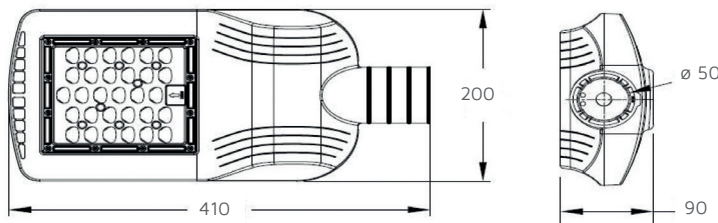

KEY DATA

Power	60W
Luminous Flux	7310lm
Colour Temperature	4000K
IP Rating	IP65
IK Rating	IK08
Mounting Point	ø 50mm
Dimensions	410 x 200 x 90mm
Warranty	5 Years Extended

Part Number

NET-15-20-02

TECHNICAL SPECIFICATIONS

Input Voltage AC	110-240V
Power Factor	>0.95
LED Luminous Flux	7800lm
Luminous Efficacy	>123lm/W
LED Manufacturer	Philips
LED Type	Luxeon 3030
No. of LEDs	60
Driver Manufacturer	Mean Well HLG
Driver Output Voltage DC	22-36V
Total Circuit Power (W)	60W +/-5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	150° x 65°
Dimmable	No
Cable Length	6m
Photocell Compatible	Yes (NET-15-20-08)
Operating Temp.	-15°C to +45°C
Lifespan	50,000 Hours
Diffuser Material	Polycarbonate
Housing Material	Aluminium
Housing Colour	Black
Weight	2.8Kg

TYPICALLY REPLACES

- 150W SON.

COMPATIBLE ACCESSORIES

Photocell	NET-15-20-08	Page 170
Wall/Corner Bracket	NET-15-16-17	Page 170
Requires Spigot Adapter	NET-15-16-19	Page 170

FEATURES & BENEFITS

- Weather and dust-proof IP66 rated housing.
- Supplied with 6m rubber flex for easy installation.
- Optional bracket for wall and corner mounting.
- Adjustable Spigot adapter available.
- Asymmetric output.
- Compliant with EN 60598-2-5.