


LED NCF LUMINAIRES
1200mm 35W (4ft)
5500K 4440lm



IES Data Files available

DIMENSIONS

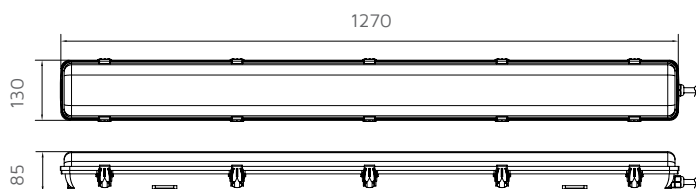

All units are in mm

KEY DATA

Power	35W
Luminous Flux	4440lm
Colour Temperature	5500K
IP Rating	IP65
IK Rating	IK08
Dimensions	1270 x 130 x 85mm
Warranty	5 Years Extended

Part Number

NET-11-11-03

TECHNICAL SPECIFICATIONS

Input Voltage AC	200-240V
Power Factor	>0.95
LED Luminous Flux	5026lm
Luminous Efficacy	140lm/W
LED Manufacturer	Honglitronic
LED Type	SMD 2835
No. of LEDs	216
Driver Manufacturer	Philips
Driver Output Voltage DC	36-42V
Total Circuit Power (W)	35W +/- 2W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker free	Yes
Operating Temp.	-0°C to +45°C
Lifespan	50,000 Hours
Fire Rating	V-2
UGR Rating	More than 19
Diffuser Material	Polycarbonate
Housing Material	Polycarbonate
Housing Colour	Grey
Weight	2.4Kg

TYPICALLY REPLACES

- 2 x 36W T8 fluorescent.
- 2 x 28W T5 fluorescent.

FEATURES & BENEFITS

- Weather and dust-proof IP65 rated housing.
- Stainless steel retaining clips.
- Easy-mounting clips.
- Compliant with EN 60598-2-1.
- High lumens per watt.

COMPATIBLE ACCESSORIES

Batten/NCF Suspension Kit	NET-46-16-04	Page 228
20mm Microwave Sensor	NET-42-43-20	Page 211
LED Non-Corrosive Emergency Kit	NET-21-33-09	Page 237
Tamper-proof clips	NET-11-16-23	Page 86